

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H03M 3/02, H03D 7/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/22735</b> <b>(43) International Publication Date:</b> 20 April 2000 (20.04.00)
<b>(21) International Application Number:</b> PCT/EP99/06786 <b>(22) International Filing Date:</b> 14 September 1999 (14.09.99)  <b>(30) Priority Data:</b> 9821839.9                      8 October 1998 (08.10.98)                      GB  <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  <b>(72) Inventor:</b> ALI, Danish; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).  <b>(74) Agent:</b> MOODY, Colin, J.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		<b>(81) Designated States:</b> CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

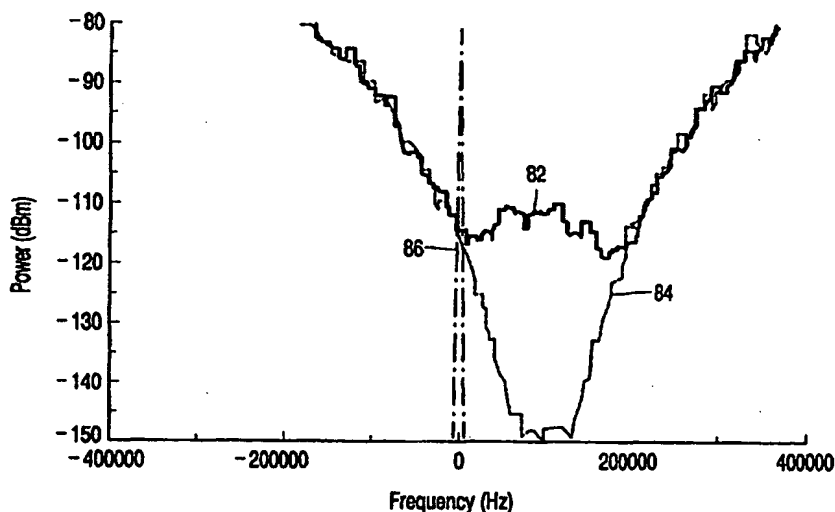**(54) Title:** RADIO RECEIVER**(57) Abstract**

A radio receiver comprises an input (10) coupled to first and second quadrature related low-IF frequency translation stages (20, 21) generating IF signals at substantially half the channel bandwidth or channel spacing. The IF signals which may be optionally filtered in a pre-filter (28), for example a polyphase filter, are applied to first and second cross-coupled continuous time, low pass Sigma-Delta modulators (30) comprising for example transconductor-capacitor integrators, all but the first integrators of which are cross-coupled by gyrators set to resonate at the IF frequency. Outputs of the Sigma-Delta modulators (30) comprise 1 bit oversampled signals. The oversampled signals in one embodiment are filtered in first decimation stages (32, 34) which provide anti-aliasing. The decimated signals are derotated (38, 40) and decimated in a second decimation means (42, 44) to provide outputs at base band. The outputs are equalised and demodulated to provide an output (48). The input signal may be frequency translated to zero IF and then filtered in low pass filters.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

## RADIO RECEIVER

## 5 Technical Field

The present invention relates to a digital radio receiver or a receiver section of a radio transceiver and to integrated circuits embodying the digital radio receiver.

## 10 Background Art

An article entitled "Quadrature Bandpass  $\Delta\Sigma$  Modulation for Digital Radio", IEEE Journal of Solid-State Circuits. Vol 32. No. 12, December 1997, pages 1935 to 1950, by S.A. Jantzi, K.W. Martin and Adel S. Sedra, mentions that a critical component in low - IF receiver architectures is one that performs  
15 bandpass analogue to digital conversion on quadrature signals. This article mentions a low IF variant of a direct conversion receiver having I and Q mixer outputs comprising narrow band signals at an IF. These outputs undergo complex, or quadrature, anti-aliasing filtering and the outputs are then digitised in concert with a quadrature bandpass Sigma - Delta modulator. The modulator  
20 takes in a complex analogue input signal and produces a complex digital output which is representative of the complex input within a narrow bandwidth. The spectrum of the output, being complex, may be asymmetric about dc. Mathematical simulations of high order Sigma - Delta modulators do not always lead to stable implementations and in consequence are difficult to design.

25 Figure 9 of this prior art article also discloses a quadrature bandpass Sigma - Delta modulator comprising several complex resonators. Each of the complex resonators is a simple complex filter which forms a complex pole on the unit circle. By having feedback around the quantizer, these poles form noise-shaping zeros responsible for nulling in-band quantization noise. Figure 11 of  
30 this prior art article discloses a fourth order complex modulator having four complex poles inside a global feedback loop. The real and imaginary inputs are

oversampled and the samples are supplied by way of respective capacitors to complex feed-ins of four complex resonators of the complex modulator. The real and imaginary channels each has a latched comparator that produces a one-bit output and drives a one-bit feedback digital to analogue converter DAC. The DAC output levels are fed back into the respective modulator stages through respective capacitors. The described structure allows independent positioning of all transfer function poles and zeros, which enables noise shaping to be performed at an arbitrary fraction of the sampling frequency and for noise-shaping zeros to be spread optimally across the band of interest. Optimal positioning of zeros within the band of interest significantly increases the signal-to-noise ratio (SNR) obtainable by a given modulator order. The described circuit has no provision for anti-aliasing which will occur due to the inputs to the Sigma - Delta modulator being sampled at the bit rate of the outputs from the latched comparators. By having the sampling before the loop filter, the loop filter cannot provide any anti-aliasing filtering which leads to interference from unwanted signals. The cited article discloses the provision of a complex anti-alias filter and amplifier to reduce this interference before the signals are applied to the Sigma - Delta modulator. This anti-alias filter has to have a high out-of-band attenuation and as a consequence it has a high power consumption and requires close matching. Such a filter if implemented as an integrated circuit might require external (or off-chip) passive components.

United States of America Patent Specification US 5,764,171 discloses a quadrature signal conversion device comprising frequency translation means for converting a received signal into frequency down converted quadrature related signals. Each of the quadrature related signals is supplied to a respective Sigma - Delta converter comprising a signal combining stage having inputs for one of the downconverted signals and for a signal fed back from an output of the Sigma - Delta converter. An output of the combining stage is coupled to an input of a filter stage, to which input is coupled the output of the filter stage of the other Sigma - Delta converter so that the Sigma - Delta converters are cross coupled thereby forming a polyphase filter. A quantiser is coupled to each of

the filter stages to provide output signals suitable for processing in a digital signal processor (DSP) which produces the receiver's output signal. Using a single filter stage reduces the quantisation noise but there is a desire to reduce the quantisation noise further.

5

#### Disclosure of Invention

An object of the present invention is to be able to make an integratable receiver or receiver section of a transceiver with improved quantisation noise reduction.

10 According to a first aspect of the present invention there is provided a receiver comprising an input, first and second quadrature related frequency translation stages coupled to the input, first and second continuous time, low pass Sigma-Delta modulators coupled to the first and second frequency translation stages, respectively, for producing oversampled digital signals, the  
15 first and second Sigma-Delta modulators having a low frequency bandpass response, means for demodulating the digitised outputs, and means for altering the bit rate of the oversampled signals to a rate required by the demodulating means, wherein the first and second Sigma-Delta modulators each comprise a corresponding plurality of N serially connected integrators, where N is an integer  
20 having a value of at least 2, and wherein the second to Nth integrators of the first Sigma - Delta modulator are cross-coupled with the corresponding integrator of the second Sigma - Delta modulator.

By the first and second Sigma - Delta modulators being continuous time modulators, the sampling follows the loop filter thereby providing anti - alias  
25 filtering. Since the cross-coupled first and second Sigma - Delta modulators have a low frequency bandpass response matching is easier to achieve. Good matching is of importance because it is not easy to remove the error component of the wanted and interfering signal once it has been generated and also because of the effect on the quantisation noise spectrum. Since the cross-  
30 coupled modulators have a low frequency bandpass response they can be implemented as a low power integrated circuit. By not cross-coupling all the

integrators, especially the first integrator, dc offsets are reduced.

In an embodiment of the receiver, each of the Sigma-Delta converters includes a continuous time loop filter before the analogue-to-digital converter (ADC) in order to pass the wanted signal band but apply heavy attenuation to  
5 signals at frequencies higher than half the sampling rate thereby avoiding aliasing.

The first and second quadrature related frequency translation stages may be low IF or, alternatively, zero IF stages.

A pre-filter, for example a polyphase filter, may be coupled between a  
10 respective output of each of the first and second frequency translation stages and a respective one of the first and second Sigma - Delta modulators. The provision of the pre-filters provides low order anti-aliasing filtering and blocking suppression which avoids the Sigma-Delta modulators having to block signals which it is estimated could require an increase in its dynamic range and a very  
15 substantial increase in sampling rate.

Automatic gain control means may be coupled between a respective output of each of the first and second frequency translation stages, operating as low IF stages, and the Sigma - Delta modulators. An advantage of providing gain control is that it reduces the dynamic range of the Sigma Delta modulators  
20 further.

When the first and second frequency translation stages are zero IF stages, the products of mixing are applied to low pass filters.

The bit rate altering means may comprise at least one decimating means.

25 In an embodiment of the present invention the oversampled outputs of the first and second Sigma-Delta modulators are applied to first decimating means coupled to outputs of the modulators for reducing the sampling rate thereby reducing the noise power, derotation means are coupled to the first decimating means, the derotation means producing a relatively pure sine wave  
30 signal thereby preventing large out-of-band quantisation noise from being aliased in band, and second decimating means are coupled to the derotation



means for reducing the sampling rate further.

The first decimating means may be cross coupled in order to give bandpass noise shaping at the low IF thereby reducing the need for a higher over-sampling factor.

- 5 According to a second aspect of the present invention there is provided an integrated circuit comprising a receiver in accordance with the first aspect of the present invention.

#### Brief Description of Drawings

- 10 The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of one embodiment of a receiver made in accordance with the present invention,

- Figure 2 is a block schematic diagram of the cross coupled Sigma-Delta modulators implemented using transconductor - capacitor integrators,

Figure 3 is graph of frequency in Hertz versus power in dBm showing the cross-coupled Sigma-Delta modulator signal and noise at a 13MHz sample rate,

- Figure 4 is the frequency spectrum (frequency versus power) of the raw output from a Sigma-Delta modulator,

Figure 5 is the frequency-spectrum (frequency versus power) after the first stage of decimation,

Figure 6 is signal and noise spectrum (frequency versus power) after the second stage of decimation,

- Figure 7 is a block schematic diagram of a cross-coupled Sigma - Delta modulators implemented using op-amp filters,

Figure 8 is a block schematic diagram of a second embodiment of a receiver made in accordance with the present invention, and

- Figure 9 is a block schematic diagram of a third embodiment of a receiver made in accordance with the present invention.

In the drawings the same reference numerals have been used to indicate

corresponding features.

### Modes for Carrying Out the Invention

For convenience of description the present invention will be described  
5 with reference to the GSM (Global System for Mobile Communications) digital cellular telephone standard.

Referring to Figure 1, the receiver (or receiver section) comprises an antenna 10 coupled to a low noise RF amplifier 14 by way of a bandpass filter 12 which selects signals in the GSM band of 925 to 960 MHz. The signal from  
10 the amplifier 14 is split at a node 16 and supplied to first inputs 18, 19 of balanced mixers 20, 21. Quadrature related local oscillator signals having a frequency offset by 100kHz (or half a channel) from the centre frequency of the received signal are supplied by a signal generator 22 to second inputs 24, 25 of the mixers 20, 21. Real and imaginary outputs 26, 27 of the mixers 20, 21,  
15 respectively, are supplied to cross coupled, continuous time, low pass Sigma - Delta modulators 30 to be described in greater detail with reference to Figure 2. Optionally a bandpass pre-filter 28 for blocking suppression is connected in the signal paths from the outputs 26, 27 of the mixers 20, 21. If desired a measure of automatic gain control may be applied to outputs of the pre-filter 28. The  
20 input signals to the Sigma-Delta modulators 30 are in-phase (I) and quadrature (Q) IF signals at 100 kHz and the outputs are oversampled 1-bit digital signals at 13 MHz.

Cross coupled, first decimation stages 32, 34 are coupled to the in-phase (I) and quadrature (Q) outputs 36, 37, respectively, of the cross coupled, low  
25 pass Sigma-Delta modulators 30. The stages 32, 34 provide anti-alias bandpass filtering and a reduction in the sampling rate by, in the present embodiment, a factor of 6. The outputs from the first decimation stages 32, 34 are at 2.17 MHz. The signals from the first decimation stages 32, 34 are derotated in derotation stages 38, 40. Second decimating stages 42, 44 are  
30 coupled to the derotation stages 38, 40, respectively, and reduce the sampling rate by, in this embodiment, a factor of 8 to provide signals at 270.83 kHz, the

bit rate of GSM. Outputs from the second decimating stages 42, 44 are supplied to an equaliser/demodulator stage 46 which provides an output 48.

The operation of the receiver shown in Figure 1 may be summarised by the incoming RF signal from the antenna 10 is converted in the balanced mixers 20, 21 into in-phase (I) and quadrature (Q) components at a low IF equal to typically half the channel bandwidth or half the channel spacing. These I and Q signals are digitised using a pair of low-pass Sigma-Delta modulators 30 which have been cross-coupled in order to shift the noise shaping minimum from zero to the low IF in use. The bitstream output from the Sigma-Delta modulators 30 is then decimated and derotated to provide a multi-bit digitised zero - IF output, the majority of the adjacent channel filtering having been done in the decimation process. The multi-bit output is then demodulated as appropriate for the application.

Figure 2 illustrates the cross coupled, continuous time, low pass Sigma-Delta Modulators 30 in greater detail. Quadrature related analogue low IF signals I and Q are applied respectively to input terminals 50, 51. Each input terminal 50, 51 is coupled to a fourth - order, time - continuous, Sigma - Delta modulator 52, 54. Each modulator 52, 54 comprises an anti-alias continuous time analogue loop filter consisting of four series connected transconductor - capacitor integrators 56, 58, 60, 62 and 57, 59, 61, 63. The second to fourth integrators of each modulator are cross-coupled by gyrators 64, 66, 68. Each stage is set to resonate at a respective frequency in the IF band; the frequency being determined in accordance with the ratio  $g_m/C$ . The value of C is set by the noise requirements and conductance  $g_m$  is set to give the desired centre frequency for that value of C. Cross coupling these stages has the effect of introducing a negative susceptance at each capacitor site whose value is determined by the shift in frequency required and the characteristic admittance of the gyrator. The first stages 56, 57 are not cross-coupled using a gyrator which avoids introducing a dc offset to the outputs of these stages. Outputs of each of the four stages 56, 58, 60, 62 and 57, 59, 61, 63 are combined in respective summation stages 70, 72. Outputs of the stages are applied to

respective 1 - bit analogue-to-digital converters (ADC) 74, 76 in which the analogue signals are oversampled to provide 1 bit signals at 13 MHz on the outputs 36, 37, respectively. By choosing a high over-sampling ratio, that is, the higher the number of samples over which the average can be made, the better  
5 will be the effective resolution of the ADC.

The outputs of the ADCs 74, 76 are also fed back, converted into analogue signals in 1 bit DACs 78, 80, and combined in summation stages 82, 84 with signals on the respective input terminals 50, 51. The feed back loops ensure that, in the frequency band of interest, the average value of the  
10 quantisation noise produced by the ADCs 74, 76 is as small as possible, to make the averaging process worthwhile.

By running the cross-coupled Sigma-Delta modulators at the sampling rate of 13 MHz with all the gyrators 64, 66, 68 set to resonate at respective frequencies in the vicinity of 100 kHz, the signal and quantisation noise spectra  
15 are as shown in Figure 3. In Figure 3 the continuous line 82 shows a GSM GMSK signal plus noise characteristic, the dotted line 84 illustrates the ADC noise floor and the broken line 86 indicates the DC noise. By choosing a low IF of 100 kHz the wanted GSM GMSK signal has been moved away from the DC noise spike 86. Additionally by reducing the clock rate to an acceptable value to  
20 save power, the GSM GMSK is well above the noise floor 84 over the whole of the 200 kHz bandwidth of the wanted signal.

The bit streams on the outputs 36, 37 of the Sigma-Delta modulators are applied to the first decimation stages 32, 34 which reduce the sample rate, reduce the very high levels of noise produced by the Sigma - Delta modulators  
25 outside the wanted signal bandwidth and provide the majority of the receiver's channel selectivity. In order to have an indication of the sort of filtering involved, reference is made to Figure 4 which shows the frequency spectrum from a fourth - order, low pass Sigma-Delta modulator fed with an input signal at maximum power. For convenience of representation, the spectrum corresponds  
30 to the use of a zero IF rather than a low IF. The signal frequency is at 50 kHz and the ADC sampling frequency is 13 MHz. Examination of the frequency

spectrum illustrates the noise shaping action of the loop filter in the modulator by the fact that there is an absence of noise at low frequencies below 50 kHz and a great deal of noise at higher frequencies.

Figure 5 is a frequency spectrum of the signal at the output of a first  
5 decimation stage in which the sampling rate of 13 MHz has been reduced by a factor of 6 to a rate of 2.17 MHz. It can be seen that the filter formed by the first decimation stage has reduced the noise power to the extent that the signal to noise ratio is +60.8dB.

Figure 6 is a frequency spectrum of the signal at the output of the second  
10 decimation stage. A decimation factor of 8 is used to reduce the sampling rate of 270.833 ksamples/sec. The filtering is more accurately controlled because this stage is largely responsible for providing channel selectivity. Integration of the noise power reveals that the signal-to-noise ratio has now increased to +82dB.

15 In connection with locating the derotation stages 38, 40 (Figure 1) between the first and second decimation stages, large out-of-band quantisation noise must not be aliased in-band so the derotation signal, effectively a local oscillator signal at -100 kHz, must be a relatively pure sine wave. A large word width is therefore needed to code the sine wave which will have an adverse  
20 effect on the power consumption of the digital signal processing unless the sampling rate has been reduced significantly. Derotation cannot be postponed until after all of the decimation has been completed because the sampling rate is then too low to encode the signal without aliasing.

The decimation of the 13 MHz signal can be done in any suitable way  
25 provided that the derotation can be effected satisfactorily. For example the factors of 6 and 8 could be say 24 and 2 respectively or 4 and 12 respectively. Also such factors can be achieved in one or more stages, for example a factor of 6 can be implemented as  $\div 2$  and  $\div 3$ . Using two or more stages may lead to a saving of power. The overall decimation factor is determined to get the bit rate  
30 to a rate required by the equaliser/demodulator stage 46.

In a non-illustrated embodiment of the invention, the

equaliser/demodulator stage 46 may be so designed that separate derotation of the bit streams is unnecessary with the result that the bitstreams are decimated and supplied direct to the stage 46.

Figure 7 illustrates the cross coupled, continuous time, low pass Sigma - Delta modulators 30 implemented using op-amp filters OP1, OP2, OP3 and OP4. The filters are of similar construction and in the interests of brevity the filter OP1 will be described in detail. An op-amp 100 has one input 102 connected to ground. A resistor 103 is connected to a second input 104 of the op-amp. A feedback capacitor 108 is coupled between an output 106 of the op-amp 100 and the second input 104.

Op-amp filters OP3 and OP4 are shown cross coupled. This is effected by the output 106 of the op-amp of the filter OP3 being coupled to the second input 104 of the op-amp of the filter OP4 by serially connected inverting amplifier 110 and resistor 112. A resistor 114 couples the output 106 of the op-amp of the filter OP4 to the second input of the op-amp of the filter OP3.

The operation of the cross coupled Sigma - Delta modulator 30 is the same as described with reference to Figure 2 and in the interests of brevity, the description will not be repeated.

Figure 8 illustrates a second embodiment of a low IF receiver in which the products of mixing in the quadrature related mixers 20, 21 are applied to an analogue polyphase filter 86 having a measure of automatic gain control (agc) provided by adjustable gain amplifiers 88, 89. The polyphase filter 86 is able to block unwanted image signals but pass the wanted signals. The cross coupling in the Sigma-Delta modulator 30 using gyrators, as shown in Figure 2 or resistors, as shown in Figure 7, increases the dynamic range of the converter. In this embodiment the sampling frequency of the ADC is 6.5 MHz and as a consequence decimation factors for the decimators 32, 34 and 42, 44 are say 3 and 8, respectively, but other combinations of factors are possible. The circuit illustrated in Figure 8 is otherwise similar to that shown in Figure 1 and in the interests of brevity will not be described again.

Figure 9 illustrates a third embodiment of the present invention in which

the receiver is configured and operated as a zero IF receiver. In this embodiment the local oscillator 22 provides quadrature related local oscillator signals at the nominal carrier frequency of the received signal and the products of mixing are applied to low pass filters 90, 91 to select the zero IF I and Q  
5 signals.

By the Sigma-Delta modulators being cross coupled it is possible to realise the desired filtering characteristic without having to provide resonators in the feedback paths from the ADCs 74, 76 (Figure 2), such resonators normally being difficult to realise in practice.

10 The circuit illustrated in Figure 9 is otherwise similar to that shown in Figure 1 and in the interests of brevity will not be described again.

When implementing the receivers shown in Figure 1, 8 and 9, the blocks up to and including the Sigma Delta modulators are fabricated in a high frequency analogue process thereby maintaining a high linearity and low noise.

15 The first and second decimation stages and the derotation stages are best done in hardware fabricated in a digital CMOS process.

Mismatches between the transfer functions of the I and Q signal paths will generally be as a result of processing variations in the fabrication of analogue parts of the receiver. However the effects of mismatches are reduced  
20 by using an IF which is less than the width of the channel or channel spacing such that the image channel is an adjacent channel with its lower interference immunity requirement.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further,  
25 the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of receivers and  
30 component parts therefor and which may be used instead of or in addition to features already described herein.

### Industrial Applicability

Digital radio receivers and implementations of digital radio receivers as integrated circuits.



## CLAIMS

1. A receiver comprising an input, first and second quadrature related frequency translation stages coupled to the input, first and second  
5 continuous time, low pass Sigma-Delta modulators coupled to the first and second frequency translation stages, respectively, for producing oversampled digital signals, the first and second Sigma-Delta modulators having a low frequency bandpass response, means for demodulating the digitised outputs, and means for altering the bit rate of the oversampled signals to a rate required  
10 by the demodulating means, wherein the first and second Sigma-Delta modulators each comprise a corresponding plurality of N serially connected integrators, where N is an integer having a value of at least 2, and wherein the second to Nth integrators of the first Sigma - Delta modulator are cross-coupled with the corresponding integrator of the second Sigma - Delta modulator.  
15
2. A receiver as claimed in claim 1, characterised in that the bit rate altering means comprises at least one decimating means.
3. A receiver as claimed in claim 1, characterised in that the bit rate  
20 altering means comprise first decimating means coupled to outputs of the first and second Sigma-Delta modulators, in that signal derotation means are coupled to the first decimating means, and in that second decimating means are coupled to the signal derotation means.
- 25 4. A receiver as claimed in claim 3, characterised in that the first decimating means are cross-coupled.
5. A receiver as claimed in claims 3, characterised in that the derotation means is adapted to provide a digital word representative of a  
30 substantially pure sine wave.


6. A receiver as claimed in claim 1, characterised in that the first and second frequency translation stages are low IF stages.

7. A receiver as claimed in claim 6, characterised in that a pre-filter  
5 couples a respective output of each of the first and second frequency translation stages to a respective one of the first and second Sigma-Delta modulators.

8. A receiver as claimed in claim 7, characterised in that automatic gain control means is coupled between each of the first and second frequency  
10 translation stages and the first and second Sigma-Delta modulators.

9. A receiver as claimed in claim 1, characterised in that the first and second frequency translation stages are zero IF stages and in that low pass filters couple the first and second frequency translation stages to the first and  
15 second Sigma - Delta modulators.

10. An integrated circuit comprising a receiver as claimed in claim 1.

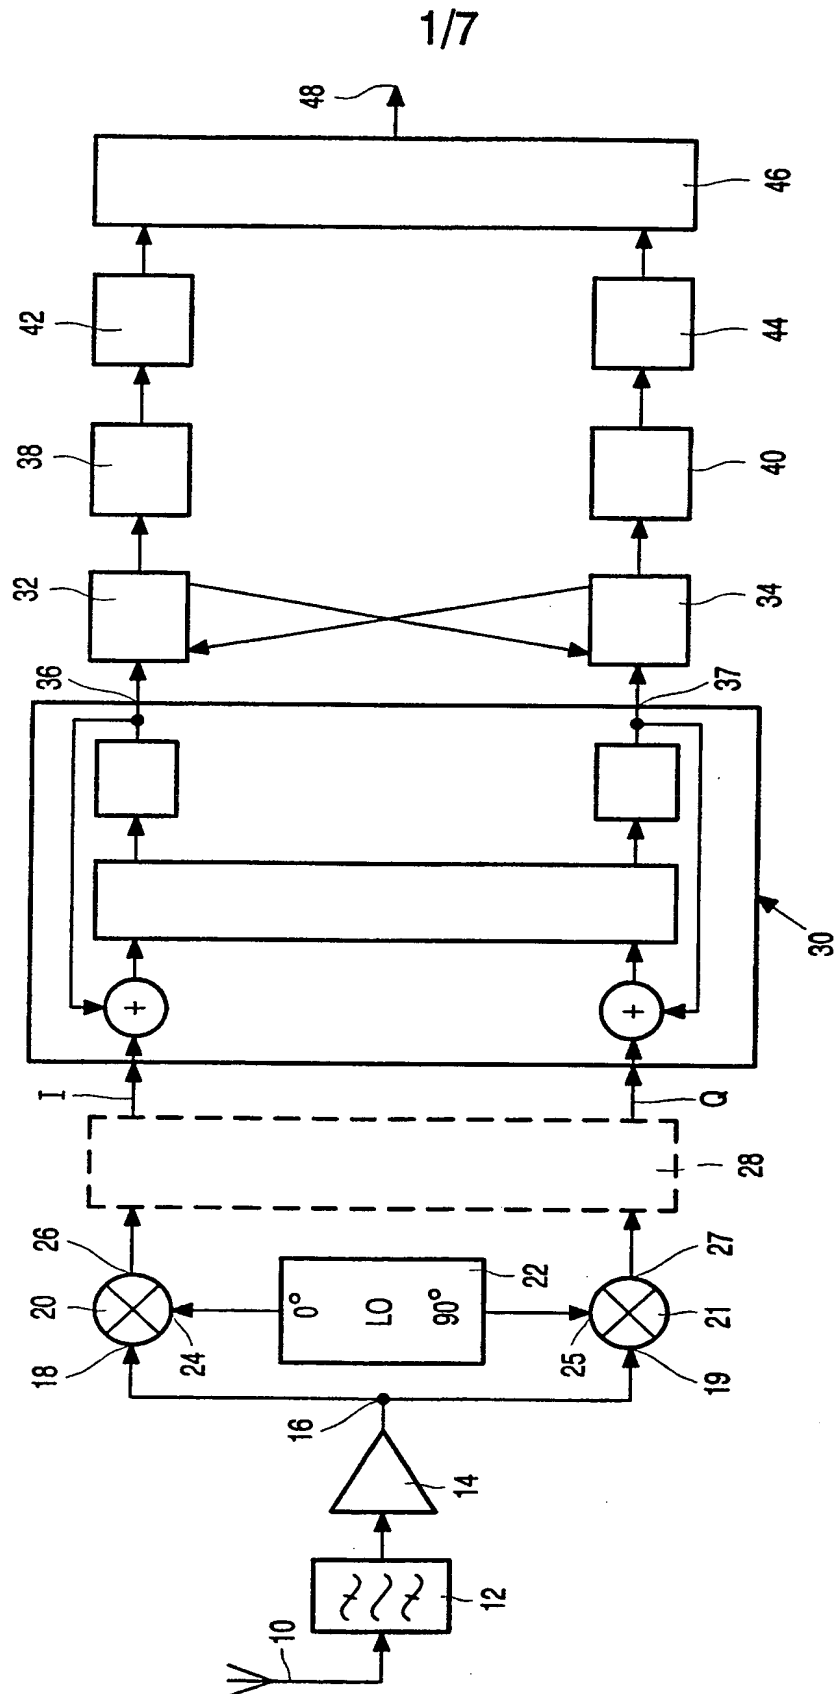

2/7

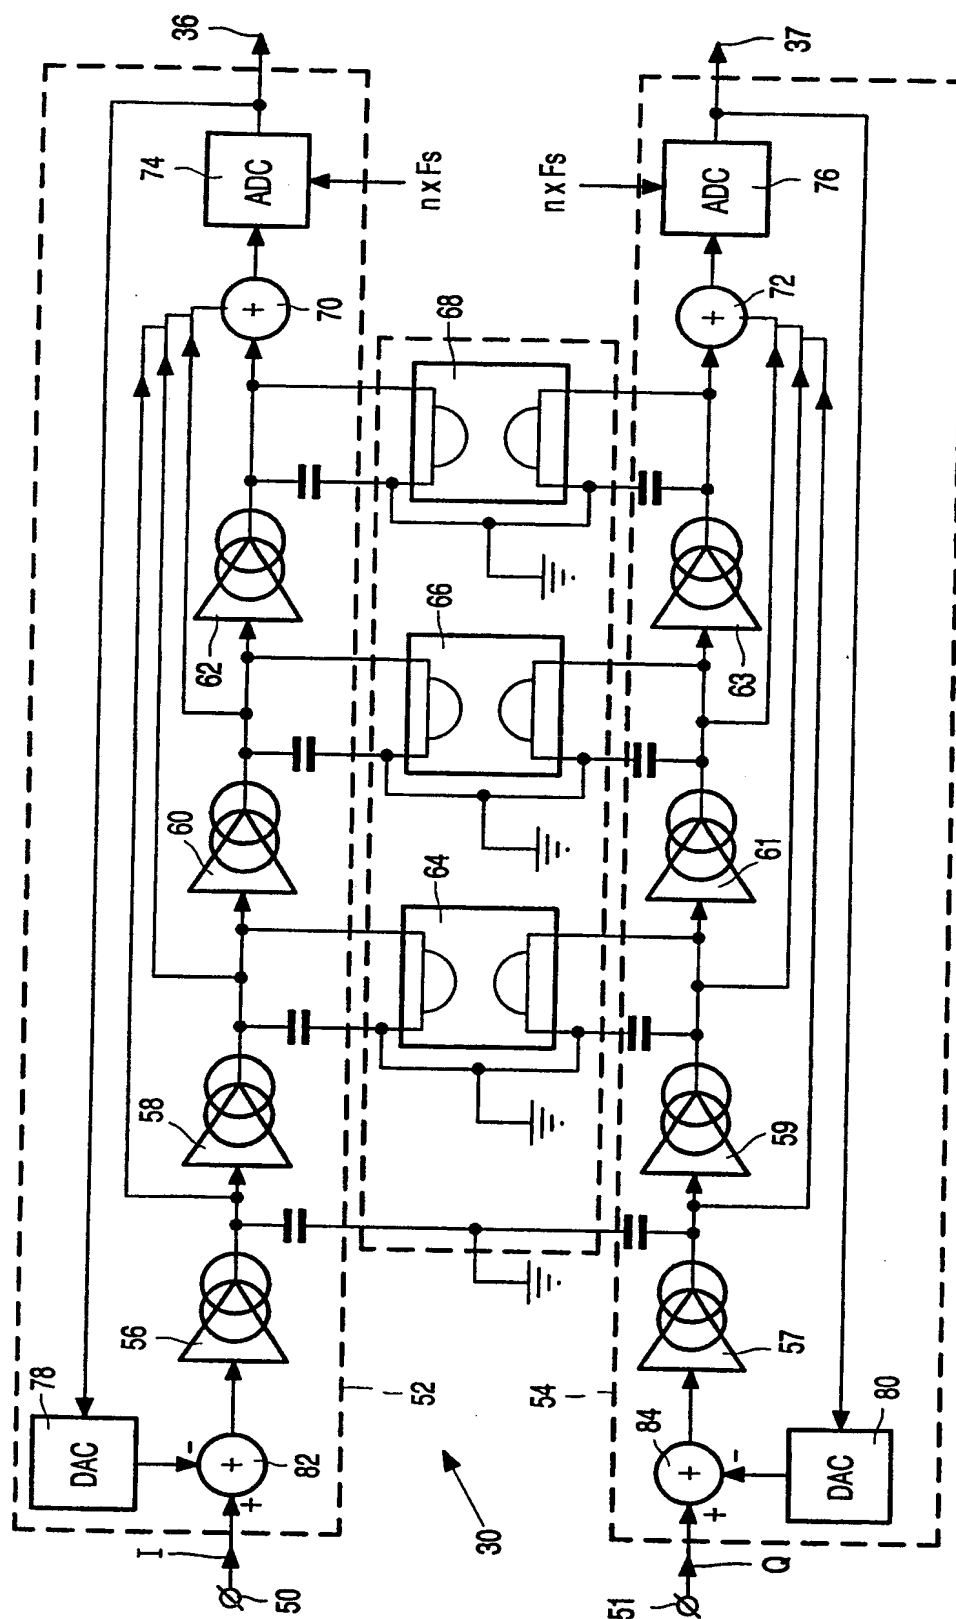


FIG. 2

3/7

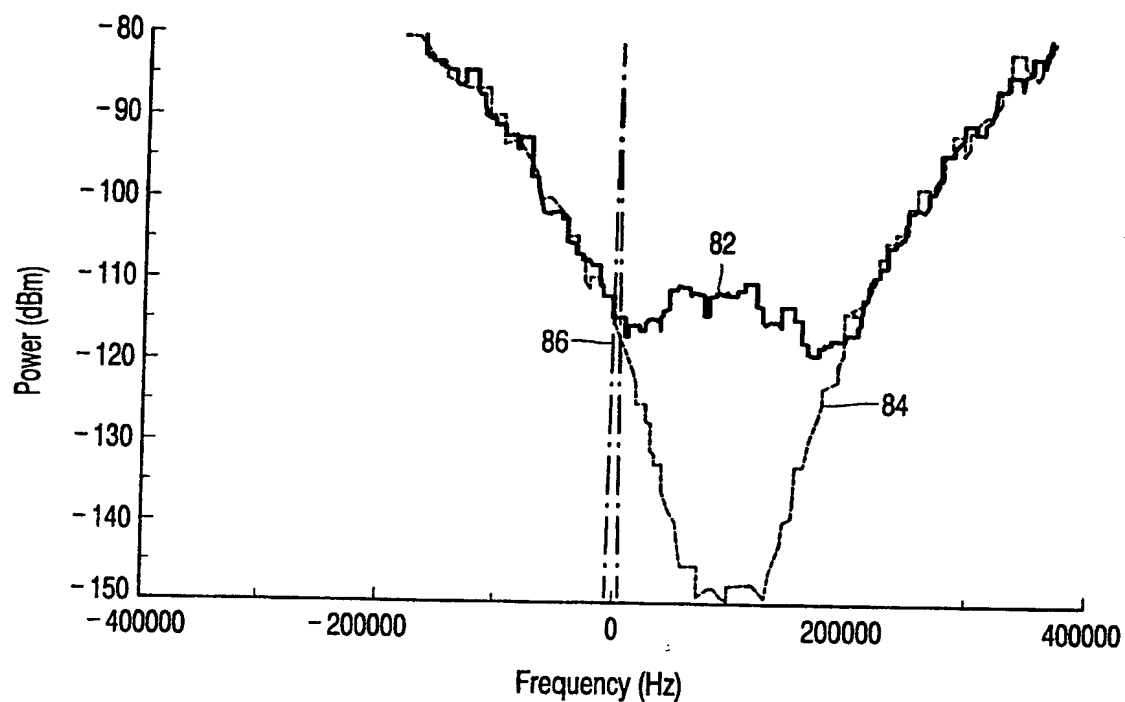


FIG. 3

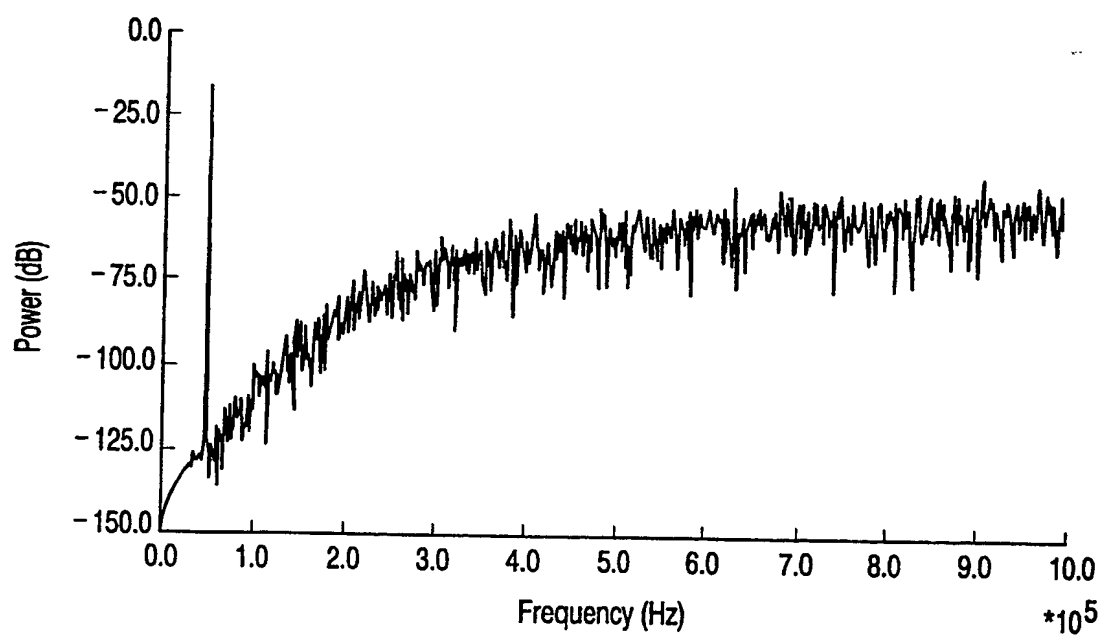


FIG. 4

4/7

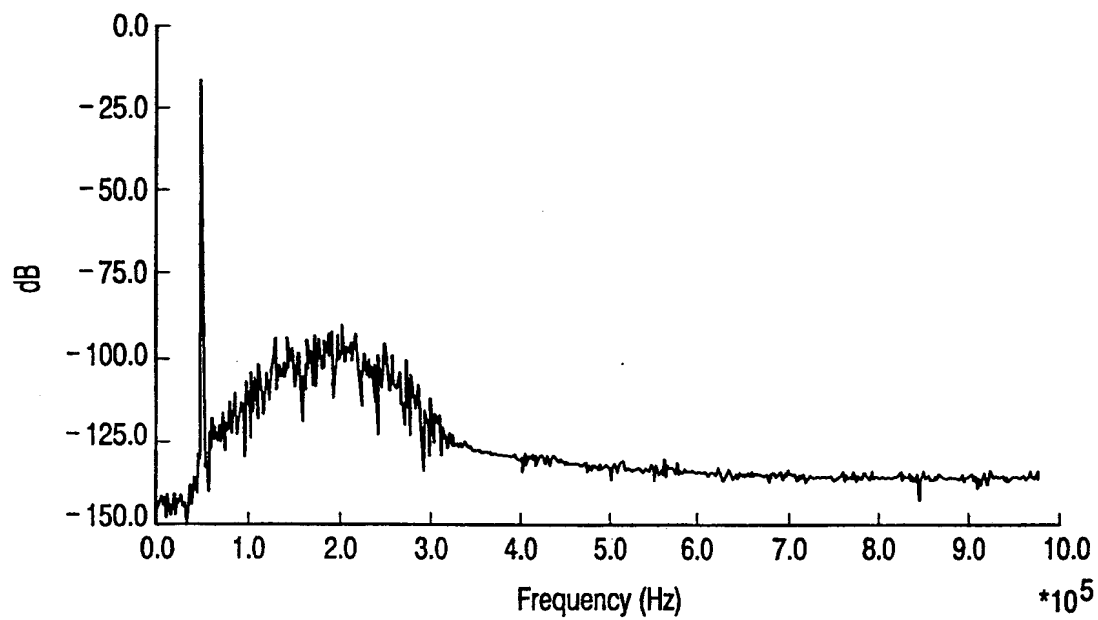


FIG. 5

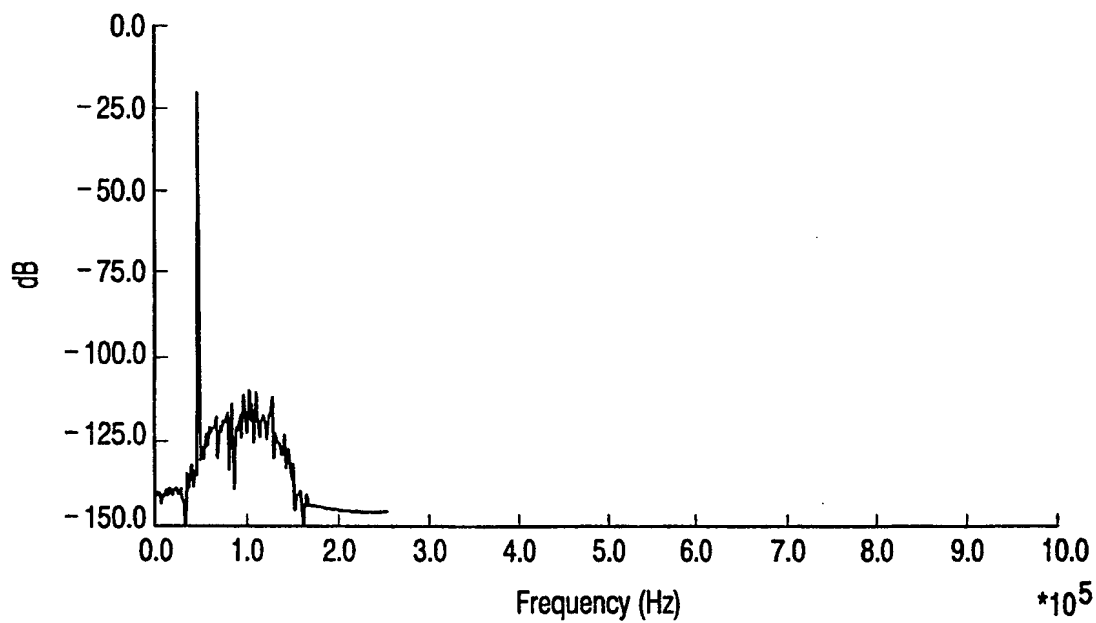
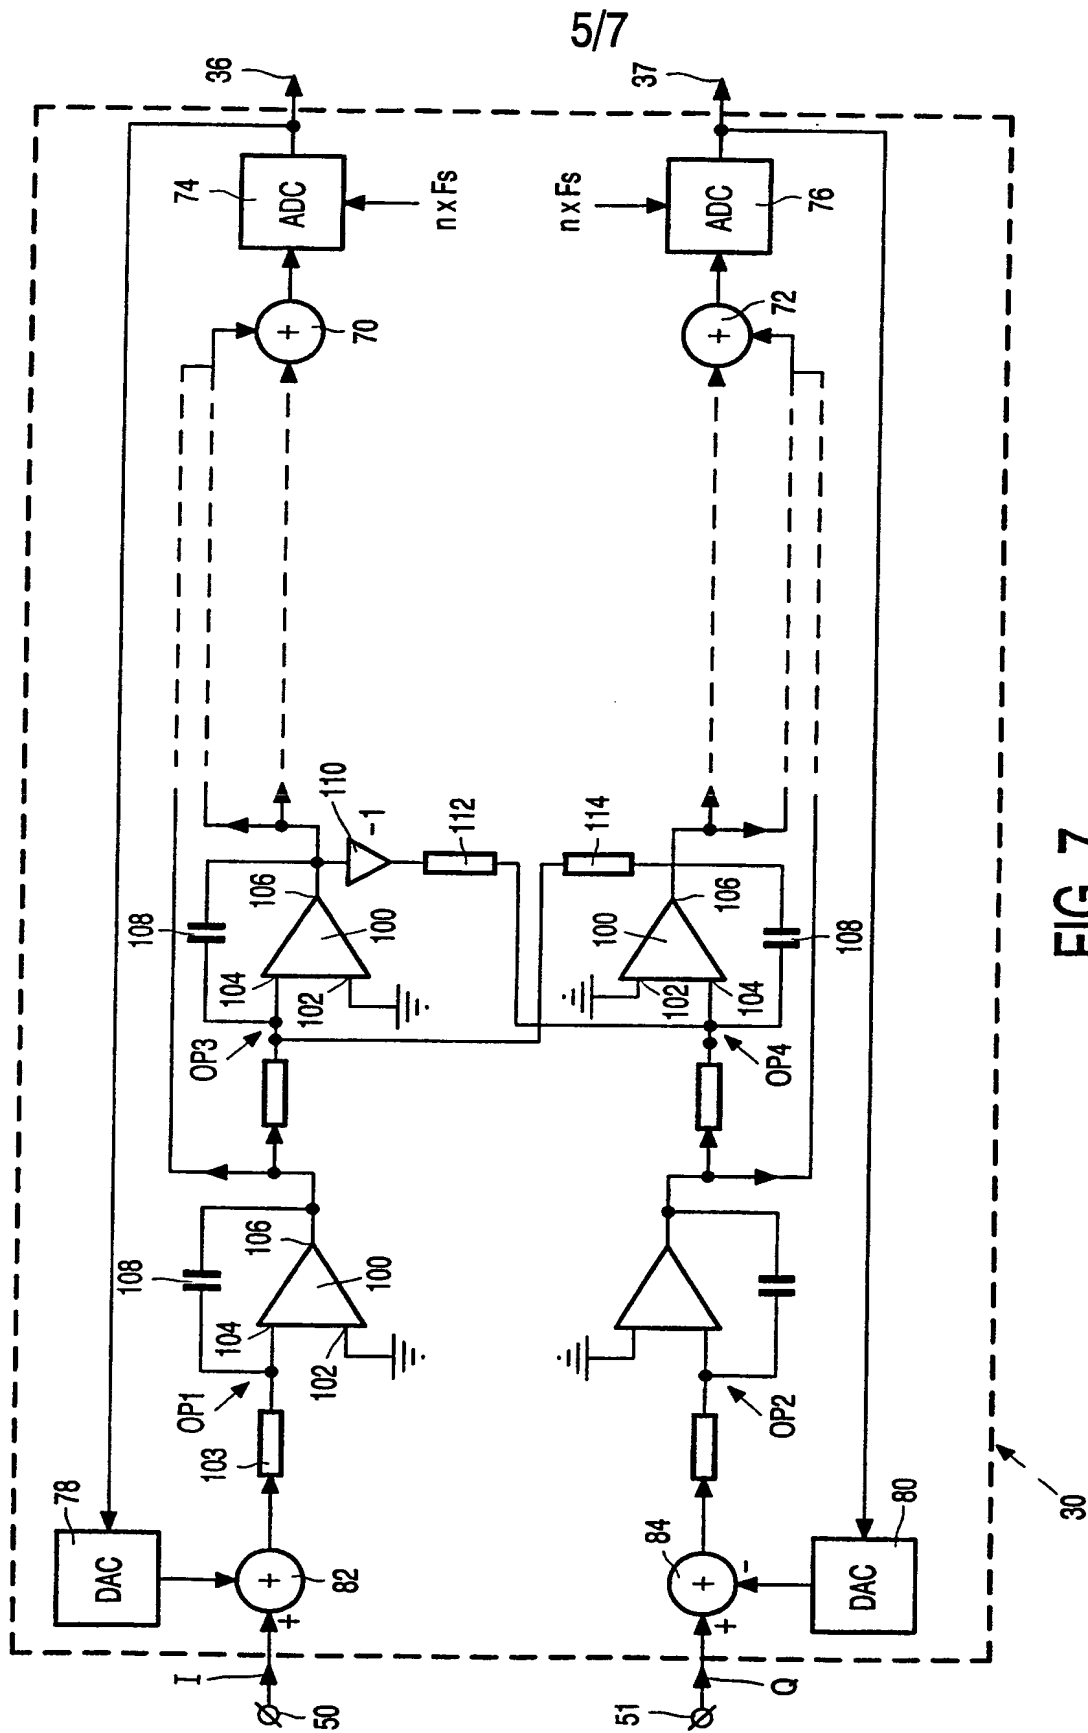


FIG. 6



**FIG. 7**

6/7

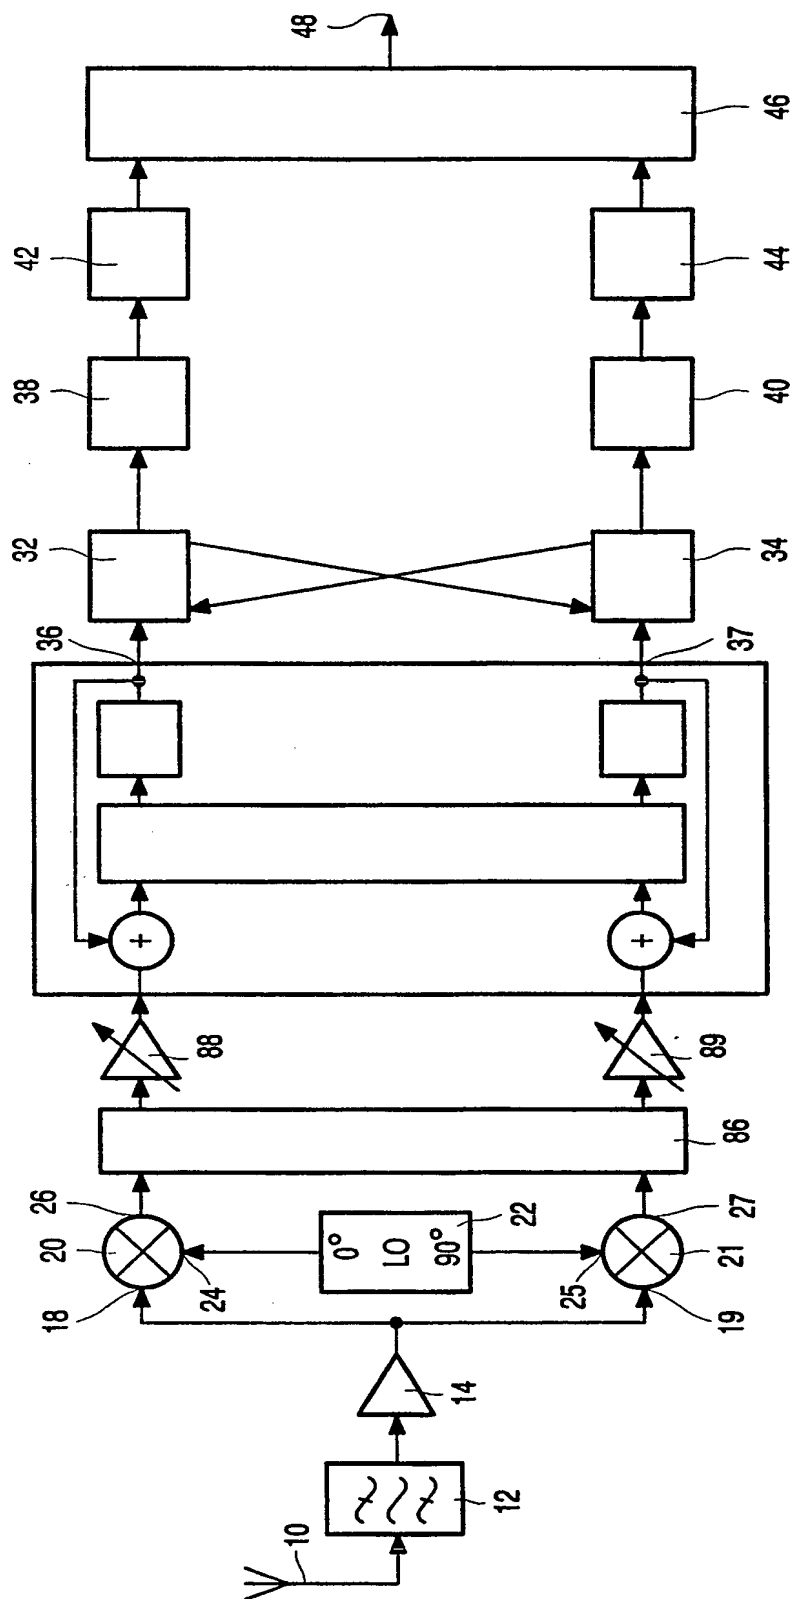


FIG. 8



7/7

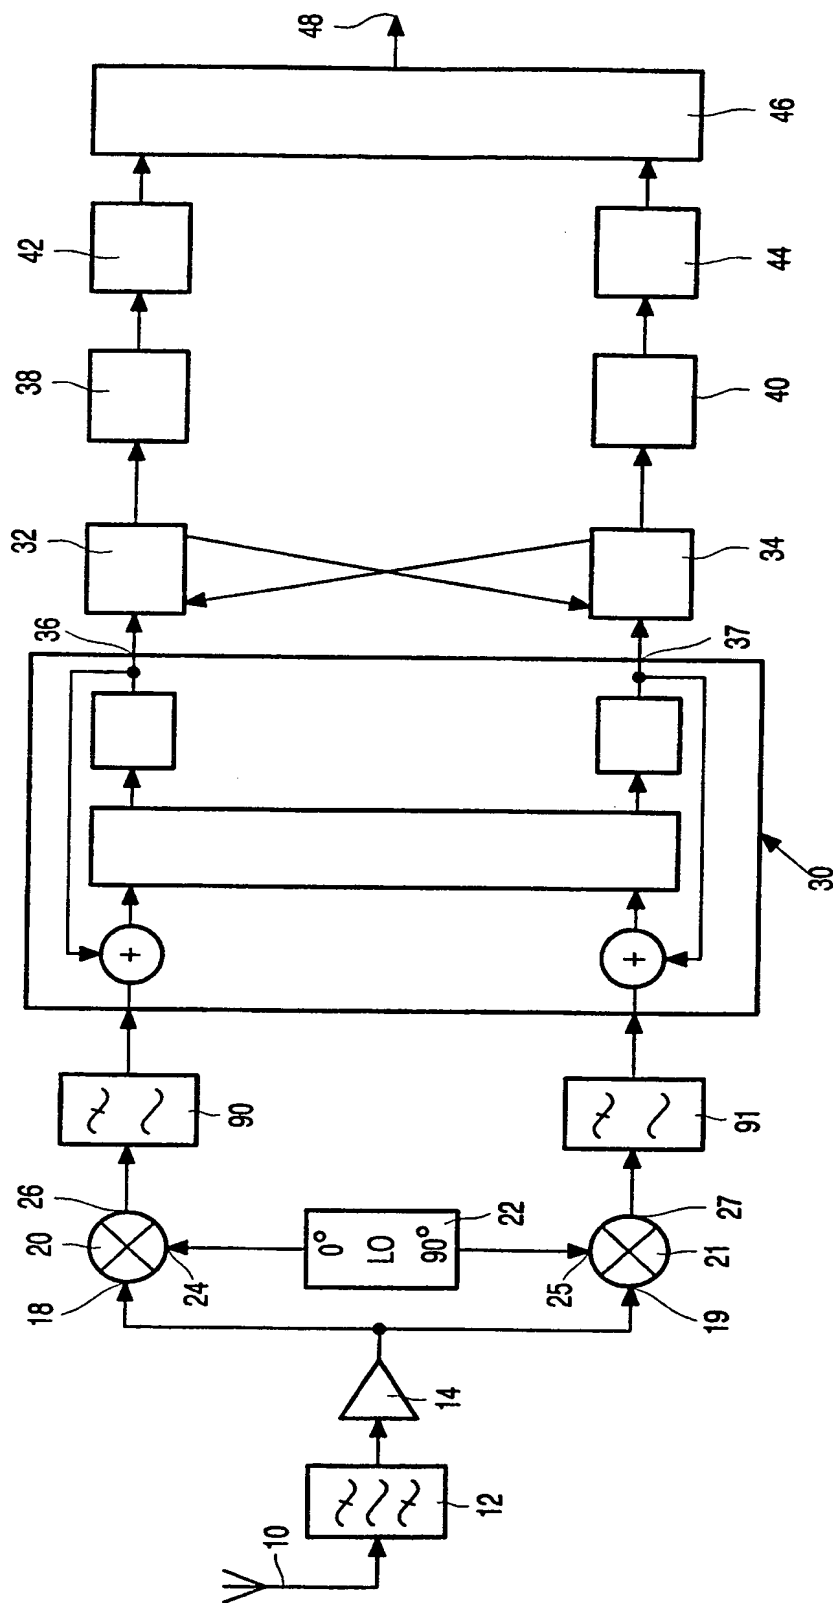


FIG. 9

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/06786

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03M3/02 H03D7/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols):

IPC 7 H03M H03D H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>JANTZI S A ET AL: "QUADRATURE BANDPASS DELTA SIGMA MODULATION FOR DIGITAL RADIO" IEEE JOURNAL OF SOLID-STATE CIRCUITS,US,IEEE INC. NEW YORK, vol. 32, no. 12, 1 December 1997 (1997-12-01), pages 1935-1950, XP000767443 ISSN: 0018-9200 cited in the application page 1937, column 1, line 22 -page 1941, column 1, line 2; figures 1,5,8,9,11</p> <p style="text-align: center;">--- -/--</p>	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 January 2000

Date of mailing of the international search report

03/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Dhondt, I

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/06786

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JANTZI S ET AL: "A COMPLEX BANDPASS DELTASIGMA CONVERTER FOR DIGITAL RADIO" INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS. (ISCAS),US,NEW YORK, IEEE,1994, pages 453-456, XP000592880 ISBN: 0-7803-1916-8 page 453, column 2, line 8 -page 455, column 1, line 10; figures 2,4,9 ----	1
A	JANTZI S ET AL: "FP 13.5: A QUADRATURE BANDPASS SIGMADELTA MODULATOR FOR DIGITAL RADIO" IEEE INTERNATIONAL SOLID STATE CIRCUITS CONFERENCE,US,IEEE INC. NEW YORK, vol. 40, 1 February 1997 (1997-02-01), pages 216-217,460, XP000753077 ISSN: 0193-6530 page 216, column 1, line 1 - line 47; figures 1,2 ----	1
A	US 5 764 171 A (STIKVOORT EDUARD F) 9 June 1998 (1998-06-09) cited in the application abstract; figure 1 ----	1
A	EP 0 643 477 A (NOKIA MOBILE PHONES LTD) 15 March 1995 (1995-03-15) abstract; figures 1-3 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/06786

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5764171	A	09-06-1998	EP 0763278 A	19-03-1997
			WO 9631943 A	10-10-1996
			JP 10501673 T	10-02-1998
<hr/>				
EP 0643477	A	15-03-1995	FI 933989 A	11-03-1995
			DE 69422109 D	20-01-2000
			JP 7154344 A	16-06-1995
			US 5734683 A	31-03-1998
<hr/>				